

# M186 SERIES

*THREE-PHASE  
AC/DC POWER SUPPLY*



## PRODUCT HIGHLIGHTS

- **THREE PHASE AC/DC POWER SUPPLY**
- **103 to 127 VAC 3 phase Input**
- **400Hz**
- **SINGLE OUTPUT**
- **UP TO 2000 W**

## M186 SERIES THREE-PHASE AC/DC POWER SUPPLY

<p><b>Applications</b>  <i>Military Power Supply (Airborne, ground-fix, shipboard), Ruggedized, Telecom, Industrial Power Supply</i></p>					
<p><b>Special Features</b></p> <table style="width: 100%; border: none;"> <tr> <td style="width: 33%; border: none; vertical-align: top;"> <ul style="list-style-type: none"> <li>• Miniature size</li> <li>• High efficiency</li> <li>• Wide input range</li> <li>• High density: up to 30.5 W/in<sup>3</sup></li> <li>• Input / Output isolation</li> </ul> </td> <td style="width: 33%; border: none; vertical-align: top;"> <ul style="list-style-type: none"> <li>• Limited Inrush Current</li> <li>• Remote Inhibit (On/Off)</li> <li>• <u>Fixed</u> switching freq. (400 kHz)</li> <li>• <u>EMI</u> filters included</li> <li>• Cos <math>\phi</math> &gt; 0.92 from 75% load</li> </ul> </td> <td style="width: 33%; border: none; vertical-align: top;"> <ul style="list-style-type: none"> <li>• Non-latching protections:                             <ul style="list-style-type: none"> <li>○ Output overload</li> <li>○ Output short-circuit</li> <li>○ Output over-voltage</li> <li>○ Over temperature</li> </ul> </li> </ul> </td> </tr> </table>			<ul style="list-style-type: none"> <li>• Miniature size</li> <li>• High efficiency</li> <li>• Wide input range</li> <li>• High density: up to 30.5 W/in<sup>3</sup></li> <li>• Input / Output isolation</li> </ul>	<ul style="list-style-type: none"> <li>• Limited Inrush Current</li> <li>• Remote Inhibit (On/Off)</li> <li>• <u>Fixed</u> switching freq. (400 kHz)</li> <li>• <u>EMI</u> filters included</li> <li>• Cos <math>\phi</math> &gt; 0.92 from 75% load</li> </ul>	<ul style="list-style-type: none"> <li>• Non-latching protections:                             <ul style="list-style-type: none"> <li>○ Output overload</li> <li>○ Output short-circuit</li> <li>○ Output over-voltage</li> <li>○ Over temperature</li> </ul> </li> </ul>
<ul style="list-style-type: none"> <li>• Miniature size</li> <li>• High efficiency</li> <li>• Wide input range</li> <li>• High density: up to 30.5 W/in<sup>3</sup></li> <li>• Input / Output isolation</li> </ul>	<ul style="list-style-type: none"> <li>• Limited Inrush Current</li> <li>• Remote Inhibit (On/Off)</li> <li>• <u>Fixed</u> switching freq. (400 kHz)</li> <li>• <u>EMI</u> filters included</li> <li>• Cos <math>\phi</math> &gt; 0.92 from 75% load</li> </ul>	<ul style="list-style-type: none"> <li>• Non-latching protections:                             <ul style="list-style-type: none"> <li>○ Output overload</li> <li>○ Output short-circuit</li> <li>○ Output over-voltage</li> <li>○ Over temperature</li> </ul> </li> </ul>			
<p><b>Electrical Specifications</b></p> <table style="width: 100%; border: none;"> <tr> <td style="width: 33%; border: none; vertical-align: top;"> <p><b><u>Normal Input Voltage</u></b>                      AC variant voltage range:                      115 ± 10% V<sub>AC,L-N</sub>,                      400 Hz, 3-Phase</p> <p><b>Optional</b> for 50/60Hz Input frequency: <b>Please consult factory for details.</b></p> <p><b><u>Line/Load regulation</u></b>                      Up to ±1% (no load to full load, -55 °C to +85 °C and over input voltage range).</p> <p><b><u>Ripple and Noise</u></b>                      100 to 150 mV<sub>p-p</sub>, typical (max. 1% of nominal voltage) measured across a 1µF ceramic capacitor.</p> </td> <td style="width: 33%; border: none; vertical-align: top;"> <p><b><u>DC Output:</u></b>                      Voltage range: 5 to 60 V<sub>DC</sub>                      Current range: 0 to 80 A                      Power range: 0 to 2000 W</p> <p><b><u>Efficiency</u></b>                      90% - Typical (nominal line voltage, 28 V<sub>DC</sub> output, full load, standard room temperature)</p> <p><b><u>Transient Over-and-undershoot</u></b>                      Voltage change less than 10% of nominal value for load step from 50% to 100%. Return to regulation in under 1 ms.</p> </td> <td style="width: 33%; border: none; vertical-align: top;"> <p><b><u>Isolation</u></b>                      Input to Output: 500 V<sub>DC</sub>                      Input to Case: 500 V<sub>DC</sub>                      Output to Case: 100 V<sub>DC</sub></p> <p><b><u>EMC</u></b>                      Designed to meet MIL-STD-461F**:                      CE102, CS101, CS114, CS115, CS116, RE102, RS101, RS103</p> <p><b><u>Turn on Transient</u></b>                      No Voltage overshoot during turn on.</p> </td> </tr> </table>			<p><b><u>Normal Input Voltage</u></b>                      AC variant voltage range:                      115 ± 10% V<sub>AC,L-N</sub>,                      400 Hz, 3-Phase</p> <p><b>Optional</b> for 50/60Hz Input frequency: <b>Please consult factory for details.</b></p> <p><b><u>Line/Load regulation</u></b>                      Up to ±1% (no load to full load, -55 °C to +85 °C and over input voltage range).</p> <p><b><u>Ripple and Noise</u></b>                      100 to 150 mV<sub>p-p</sub>, typical (max. 1% of nominal voltage) measured across a 1µF ceramic capacitor.</p>	<p><b><u>DC Output:</u></b>                      Voltage range: 5 to 60 V<sub>DC</sub>                      Current range: 0 to 80 A                      Power range: 0 to 2000 W</p> <p><b><u>Efficiency</u></b>                      90% - Typical (nominal line voltage, 28 V<sub>DC</sub> output, full load, standard room temperature)</p> <p><b><u>Transient Over-and-undershoot</u></b>                      Voltage change less than 10% of nominal value for load step from 50% to 100%. Return to regulation in under 1 ms.</p>	<p><b><u>Isolation</u></b>                      Input to Output: 500 V<sub>DC</sub>                      Input to Case: 500 V<sub>DC</sub>                      Output to Case: 100 V<sub>DC</sub></p> <p><b><u>EMC</u></b>                      Designed to meet MIL-STD-461F**:                      CE102, CS101, CS114, CS115, CS116, RE102, RS101, RS103</p> <p><b><u>Turn on Transient</u></b>                      No Voltage overshoot during turn on.</p>
<p><b><u>Normal Input Voltage</u></b>                      AC variant voltage range:                      115 ± 10% V<sub>AC,L-N</sub>,                      400 Hz, 3-Phase</p> <p><b>Optional</b> for 50/60Hz Input frequency: <b>Please consult factory for details.</b></p> <p><b><u>Line/Load regulation</u></b>                      Up to ±1% (no load to full load, -55 °C to +85 °C and over input voltage range).</p> <p><b><u>Ripple and Noise</u></b>                      100 to 150 mV<sub>p-p</sub>, typical (max. 1% of nominal voltage) measured across a 1µF ceramic capacitor.</p>	<p><b><u>DC Output:</u></b>                      Voltage range: 5 to 60 V<sub>DC</sub>                      Current range: 0 to 80 A                      Power range: 0 to 2000 W</p> <p><b><u>Efficiency</u></b>                      90% - Typical (nominal line voltage, 28 V<sub>DC</sub> output, full load, standard room temperature)</p> <p><b><u>Transient Over-and-undershoot</u></b>                      Voltage change less than 10% of nominal value for load step from 50% to 100%. Return to regulation in under 1 ms.</p>	<p><b><u>Isolation</u></b>                      Input to Output: 500 V<sub>DC</sub>                      Input to Case: 500 V<sub>DC</sub>                      Output to Case: 100 V<sub>DC</sub></p> <p><b><u>EMC</u></b>                      Designed to meet MIL-STD-461F**:                      CE102, CS101, CS114, CS115, CS116, RE102, RS101, RS103</p> <p><b><u>Turn on Transient</u></b>                      No Voltage overshoot during turn on.</p>			
<p><b>Protections *</b></p> <table style="width: 100%; border: none;"> <tr> <td style="width: 33%; border: none; vertical-align: top;"> <p><b><u>Input</u></b></p> <ul style="list-style-type: none"> <li>• <b>Inrush Current Limiter</b>                              Up to 6 times the maximum input current for less than 50 µs.</li> </ul> </td> <td style="width: 33%; border: none; vertical-align: top;"> <p><b><u>Output</u></b></p> <ul style="list-style-type: none"> <li>• <b>Over-voltage Protection</b>                              Passive transorb on output, 120% ± 10% of nominal voltage.</li> <li>• <b>Current limiting</b>                              Continuous protection (10 to 30% above maximum current) for unlimited time.</li> </ul> </td> <td style="width: 33%; border: none; vertical-align: top;"> <p><b><u>General</u></b></p> <ul style="list-style-type: none"> <li>• <b>Over temperature protection</b>                              Shutdown at baseplate temperature of +105 °C ± 5 °C. Automatic recovery at base plate temperature lower than +95 °C ± 5 °C.</li> </ul> </td> </tr> </table>			<p><b><u>Input</u></b></p> <ul style="list-style-type: none"> <li>• <b>Inrush Current Limiter</b>                              Up to 6 times the maximum input current for less than 50 µs.</li> </ul>	<p><b><u>Output</u></b></p> <ul style="list-style-type: none"> <li>• <b>Over-voltage Protection</b>                              Passive transorb on output, 120% ± 10% of nominal voltage.</li> <li>• <b>Current limiting</b>                              Continuous protection (10 to 30% above maximum current) for unlimited time.</li> </ul>	<p><b><u>General</u></b></p> <ul style="list-style-type: none"> <li>• <b>Over temperature protection</b>                              Shutdown at baseplate temperature of +105 °C ± 5 °C. Automatic recovery at base plate temperature lower than +95 °C ± 5 °C.</li> </ul>
<p><b><u>Input</u></b></p> <ul style="list-style-type: none"> <li>• <b>Inrush Current Limiter</b>                              Up to 6 times the maximum input current for less than 50 µs.</li> </ul>	<p><b><u>Output</u></b></p> <ul style="list-style-type: none"> <li>• <b>Over-voltage Protection</b>                              Passive transorb on output, 120% ± 10% of nominal voltage.</li> <li>• <b>Current limiting</b>                              Continuous protection (10 to 30% above maximum current) for unlimited time.</li> </ul>	<p><b><u>General</u></b></p> <ul style="list-style-type: none"> <li>• <b>Over temperature protection</b>                              Shutdown at baseplate temperature of +105 °C ± 5 °C. Automatic recovery at base plate temperature lower than +95 °C ± 5 °C.</li> </ul>			

\* Thresholds and protections can be modified / removed – please consult factory.

\*\* Depending on configuration, an external filter may be required to comply with EMI requirements.

## M186 SERIES THREE-PHASE AC/DC POWER SUPPLY

### Environmental Conditions

Designed to Meet MIL-STD-810F

#### Temperature

Methods 501.4 & 502.4

Operating: -55°C to +85°C (at baseplate)

Storage: -55°C to +125°C (ambient)

#### Altitude

Method 500.4

Procedure I – Storage/Air transport:

up to 70,000 ft. (non-operational)

Procedure II – Operation/Air Carriage:

up to 40,000 ft. (operational)

#### Humidity

Method 507.4

Up to 95% RH

#### Vibration

Method 514.5

Procedure I, Category 24

General minimum integrity exposure

IAW Figure 514.5C-17

1 hour per axis.

#### Shock

Method 516.5

Procedure I

20 g / 11 ms terminal peak sawtooth shock pulse

#### Salt Fog

Method 509.4

### Reliability

100,000 hours, calculated IAW MIL-HDBK-217F Notice 2 at +85 °C baseplate, Ground fixed conditions.

# M186 SERIES THREE-PHASE AC/DC POWER SUPPLY

## Pin Assignment

**Connector type:** M24308/24-39F or eq.

**Mating connector type** M24308/2-3F or eq.

Pin No.	Description
4, 5, 17	PHASE A
7, 8, 20	PHASE B
10, 11, 23	PHASE C
15	+ SENSE †
2	- SENSE †
14	INHIBIT
1	SIGNAL RTN
25	CHASSIS

---

† Please inform factory if sense lines are required to be tied to the output from within, or if the remote sense compensation function will be used.

## M186 SERIES THREE-PHASE AC/DC POWER SUPPLY

### Functions and Signals

#### **INHIBIT**

The **INHIBIT** signal is used to turn the power supply ON and OFF.

OPEN – will turn on the power supply.

SHORT – between pin 14 and pin 1 will turn off the power supply.

This signal is referenced to the **SIGNAL RTN** pin.


#### **SENSE**

The **SENSE** is used to achieve accurate load regulations at load terminals (this is done by connecting the pins directly to the load's terminals).

The use of remote sense has a limit of voltage dropout between converter's output and load terminals of 2-10% of voltage output (up to 2V).


Please note that if Sense lines are not used the output may rise as much as 2V above nominal outputs.

### Typical Connection Diagram

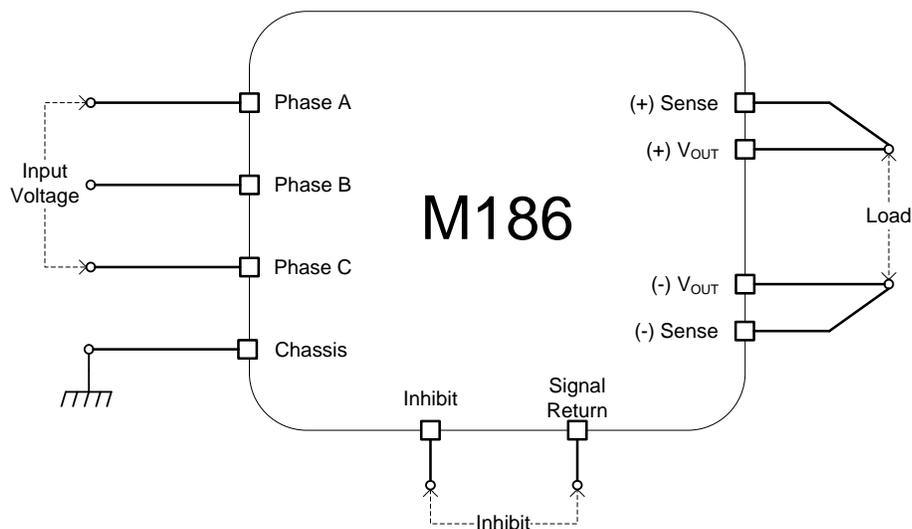


**M186 SERIES THREE-PHASE AC/DC POWER SUPPLY**

**Outline Drawing**

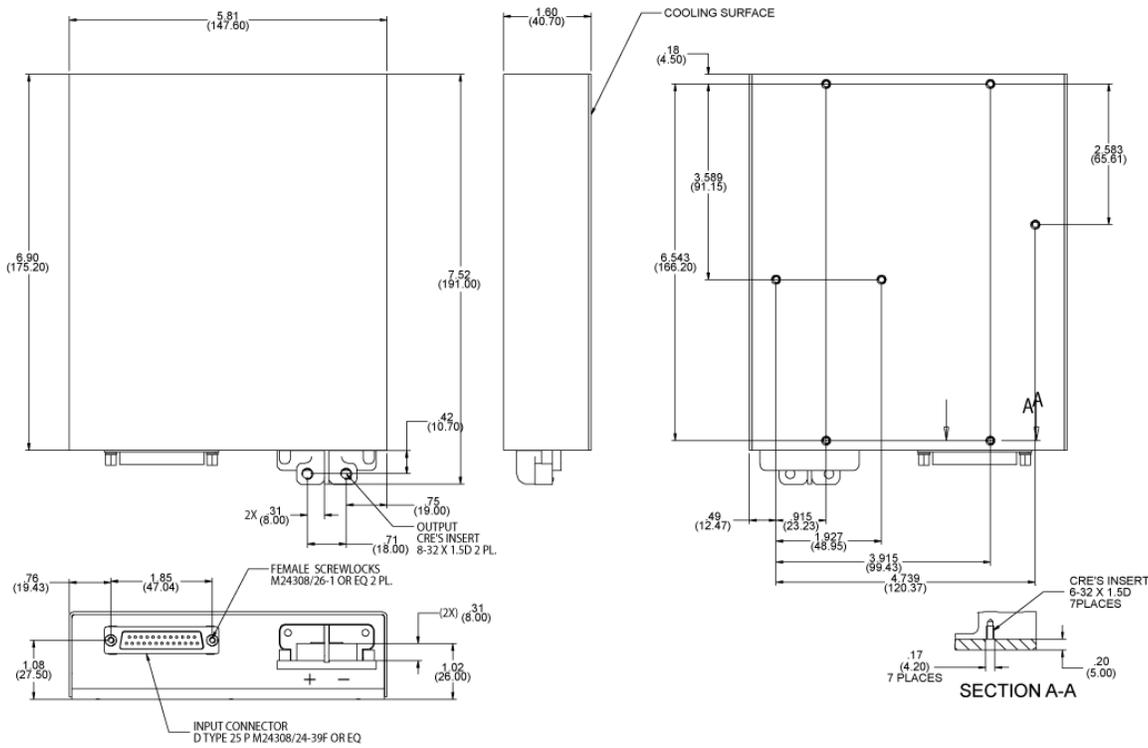

**Heat Dissipation Surface**

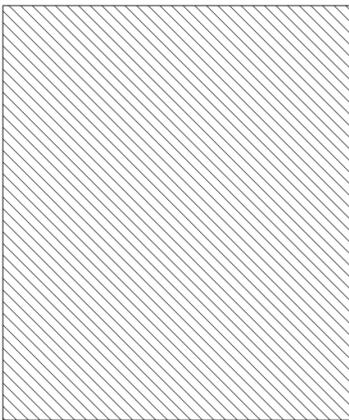

Dissipation Area  
40.08 in<sup>2</sup>  
(258.6 cm<sup>2</sup>)

Notes

1. Dimensions are in inches [mm]
2. Tolerance is:  
.XX ± 0.025 in  
.XXX ± 0.010 in
3. Weight: Approx. 4.4 lbs [2 kg]

# M186 SERIES THREE-PHASE AC/DC POWER SUPPLY

## Standard Configurations

Part number	Input		Output	
	Voltage range	Frequency	Voltage	Current
M186-100	3-phase, 103 to 127 V <sub>AC</sub>	400 Hz	12 V <sub>DC</sub>	70 A
M186-101	3-phase, 103 to 127 V <sub>AC</sub>	400 Hz	15 V <sub>DC</sub>	70 A
M186-102	3-phase, 103 to 127 V <sub>AC</sub>	400 Hz	24 V <sub>DC</sub>	70 A
M186-103	3-phase, 103 to 127 V <sub>AC</sub>	400 Hz	28 V <sub>DC</sub>	70 A
M186-104	3-phase, 103 to 127 V <sub>AC</sub>	400 Hz	36 V <sub>DC</sub>	55 A
M186-105	3-phase, 103 to 127 V <sub>AC</sub>	400 Hz	48 V <sub>DC</sub>	40 A

***Note: Specifications are subject to change without prior notice by the manufacture***