



MILTECH™ 300-HoB

Military Grade USB 3.1 advanced featured Smart HUB On Board (USBHoB)

PRODUCT DESCRIPTION

The MILTECH™ 300-HoB USB hub enables the connectivity and communication between multiple USB devices and the main computer. This USB hub features 6 USB 3.1 ports each of them also supports battery charging functionality along with regular USB3.1 data path, a dedicated IO port (I²C, External Power and GPIO compatible), and a single gigabit Ethernet port.

With a wide input voltage range of 12-28VDC and up to 2A downstream power per port for either charging or powering devices. The MILTECH 300-HoB supports the four most popular battery charging profiles (DCP,


CDP, SDP and custom profiles) to power and charge USB devices including: portable handhelds, storage, sensors, human interface devices and GPS.

The internal Ethernet interface allows to communicate with upstream devices over a standard Ethernet network, further extending the flexibility of the hub and attached USB devices.

MILTECH™ 300 designed to withstand MIL-STD-810 environmental compliance and MIL-STD-461 EMI/RFI compliance when installed in an appropriate chassis.

SPECIFICATIONS

COMMUNICATION PORTS	<ul style="list-style-type: none"> • Port 1 USB3.1/USB2 upstream port • Port 2-6 USB3.1/USB2 downstream ports • Port 7 Ethernet 10/100/1000BT port via USB to LAN Bridge • Port 8 IO port for I2C/GPIO/External Power Input • Per port LEDs indication
CONNECTORS	<ul style="list-style-type: none"> • 2 x Samtec QTE-028-01-L-D-DP-A-K
STANDARDS	<ul style="list-style-type: none"> • MILSTD-461, MILSTD-810, IP68 • When installed in an appropriate chassis
BATTERY CHARGE	<ul style="list-style-type: none"> • High Power Chargers for most popular battery powered devices, via all USB 3.1 downstream ports, up to 2A per port. • Supports the following USB-IF BC1.2 charging profiles: <ul style="list-style-type: none"> - DCP: Dedicated Charging Port (Power brick with no data) - CDP: Charging Downstream Port (1.5A with data) - SDP: Standard Downstream Port (0.5A with data) - Custom profiles loaded via SMBus • All downstream ports support individual port power control, over-current & Short circuit protection. • Over voltage / Reverse Voltage protections for Self-Powered and VBUS-powered supply sources. • USB ESD Protection up to 17KV (Air) and 12KV (Contact).

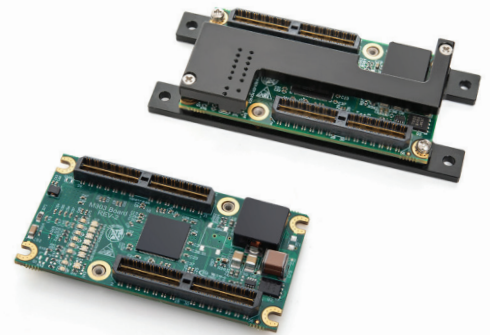




MILTECH™ 300-HoB

Military Grade USB 3.1 advanced featured Smart HUB On Board (USBHoB)

SPECIFICATIONS

STANDARDS COMPLIANCE	<ul style="list-style-type: none"> • USB 3.1 (Gen1) Specification - supports 5Gbps SuperSpeed (SS) • 480Mbps High-Speed (HS) • 12Mbps Full-Speed (FS) • 1.5Mbps Low-Speed (LS)
POWER	<ul style="list-style-type: none"> • 5VDC (USB) INPUT via Upstream USB Port, or 12-28VDC external power via I/O Power Connector, for high power applications. • Output 5VDC Aggregated up to 15A, and up to 2A per port
ELECTROMAGNETIC	<ul style="list-style-type: none"> • MIL-STD-461 Electromagnetic compatibility when installed in an appropriate chassis
PHYSICAL	<ul style="list-style-type: none"> • Dimensions: 73mm (L) x 38mm (W) x 11mm (H) • Weight: 24.2gr
INSTALLATION	<ul style="list-style-type: none"> • Portable, 4 screws for mounting to any flat surface
COOLING	<ul style="list-style-type: none"> • No Moving Parts. Passive Cooling
TEMPERATURE	<ul style="list-style-type: none"> • Operational: -40°C to +85°C (-40°F to +185°F) - Cold Start-Up • Storage: -45°C to +85°C (-49°F to +185°F)

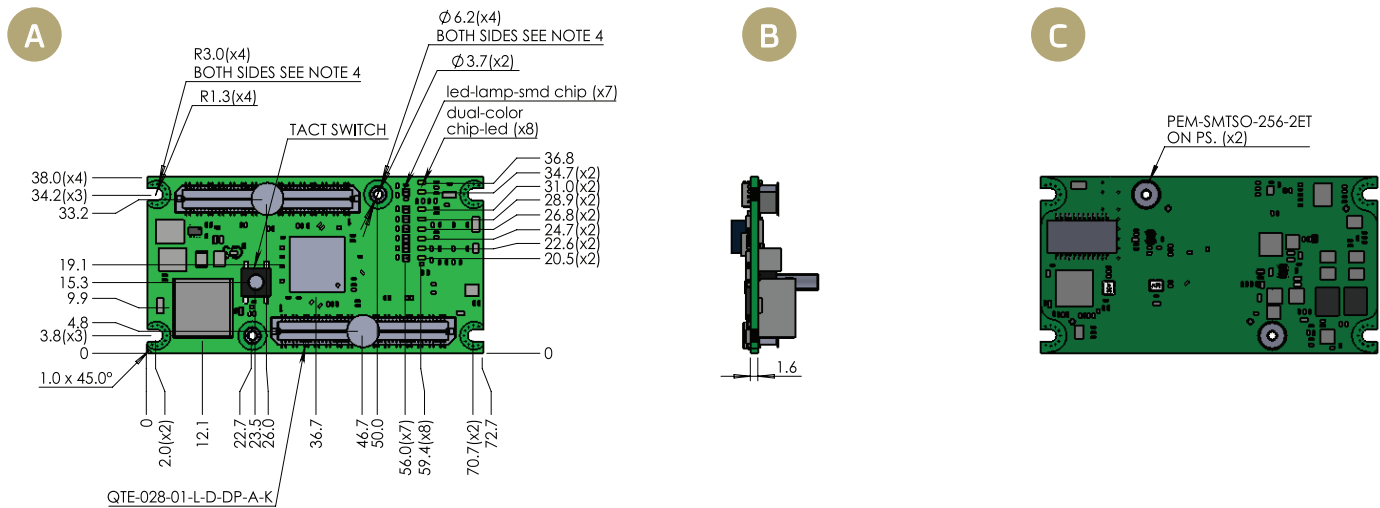

ORDERING INFORMATION

PART NUMBER	DESCRIPTION
1-300-000	Military Grade USB 3.1 Smart HUB On Board
1-CP300-000	Cooling base plate for MILTECH300