


M359-2 2.0KW/2.5KVA UPS for Shipboard Application

Milpower Source M359-2 is a ruggedized, high performance On-Line UPS designed for Naval Shipboard and tough industrial applications.

The main features of the M359-2 are:

- Full Compliance with MIL-STD-1399, Section 300B, Type I Power (115VAC/60Hz).
- Internal Input Isolation Transformer.
- A front panel loaded, Plug-in Battery Pack.
- Optional Extended Holdup-time (9 minutes at 1.9KW).
- Real sine-wave 115VAC/60Hz output, synthesized from a crystal oscillator.
- Very low Input Current Harmonic content (MIL-STD-1399 compliant).
- Better than 98% Input Power Factor.
- Very low input-to-chassis capacitance (MIL-STD-1399 compliant).
- Full galvanic isolation between Input, Chassis GND and Output.
- 1,000V / 50μs spike capability (MIL-STD-1399-300B compliant).
- Complies with MIL-STD-461F.
- Complies with MIL-S-901D (Grade A, Class I &2) and MIL-STD-167-1 (Type I).
- Remote Panel ON/OFF capability.
- By-pass mode, via internal Power Conditioner, Isolation Transformer and Relays.
- MS Power Connectors.
- RS-232 or Ethernet SNMP v1, v2 or v3 Control and Monitor.
- J-STD-001B and IPC-610A Class-3 Workmanship.
- Polyurethane Conformal Coating on PWB's per MIL-I-46058C and IPC-CC-830.

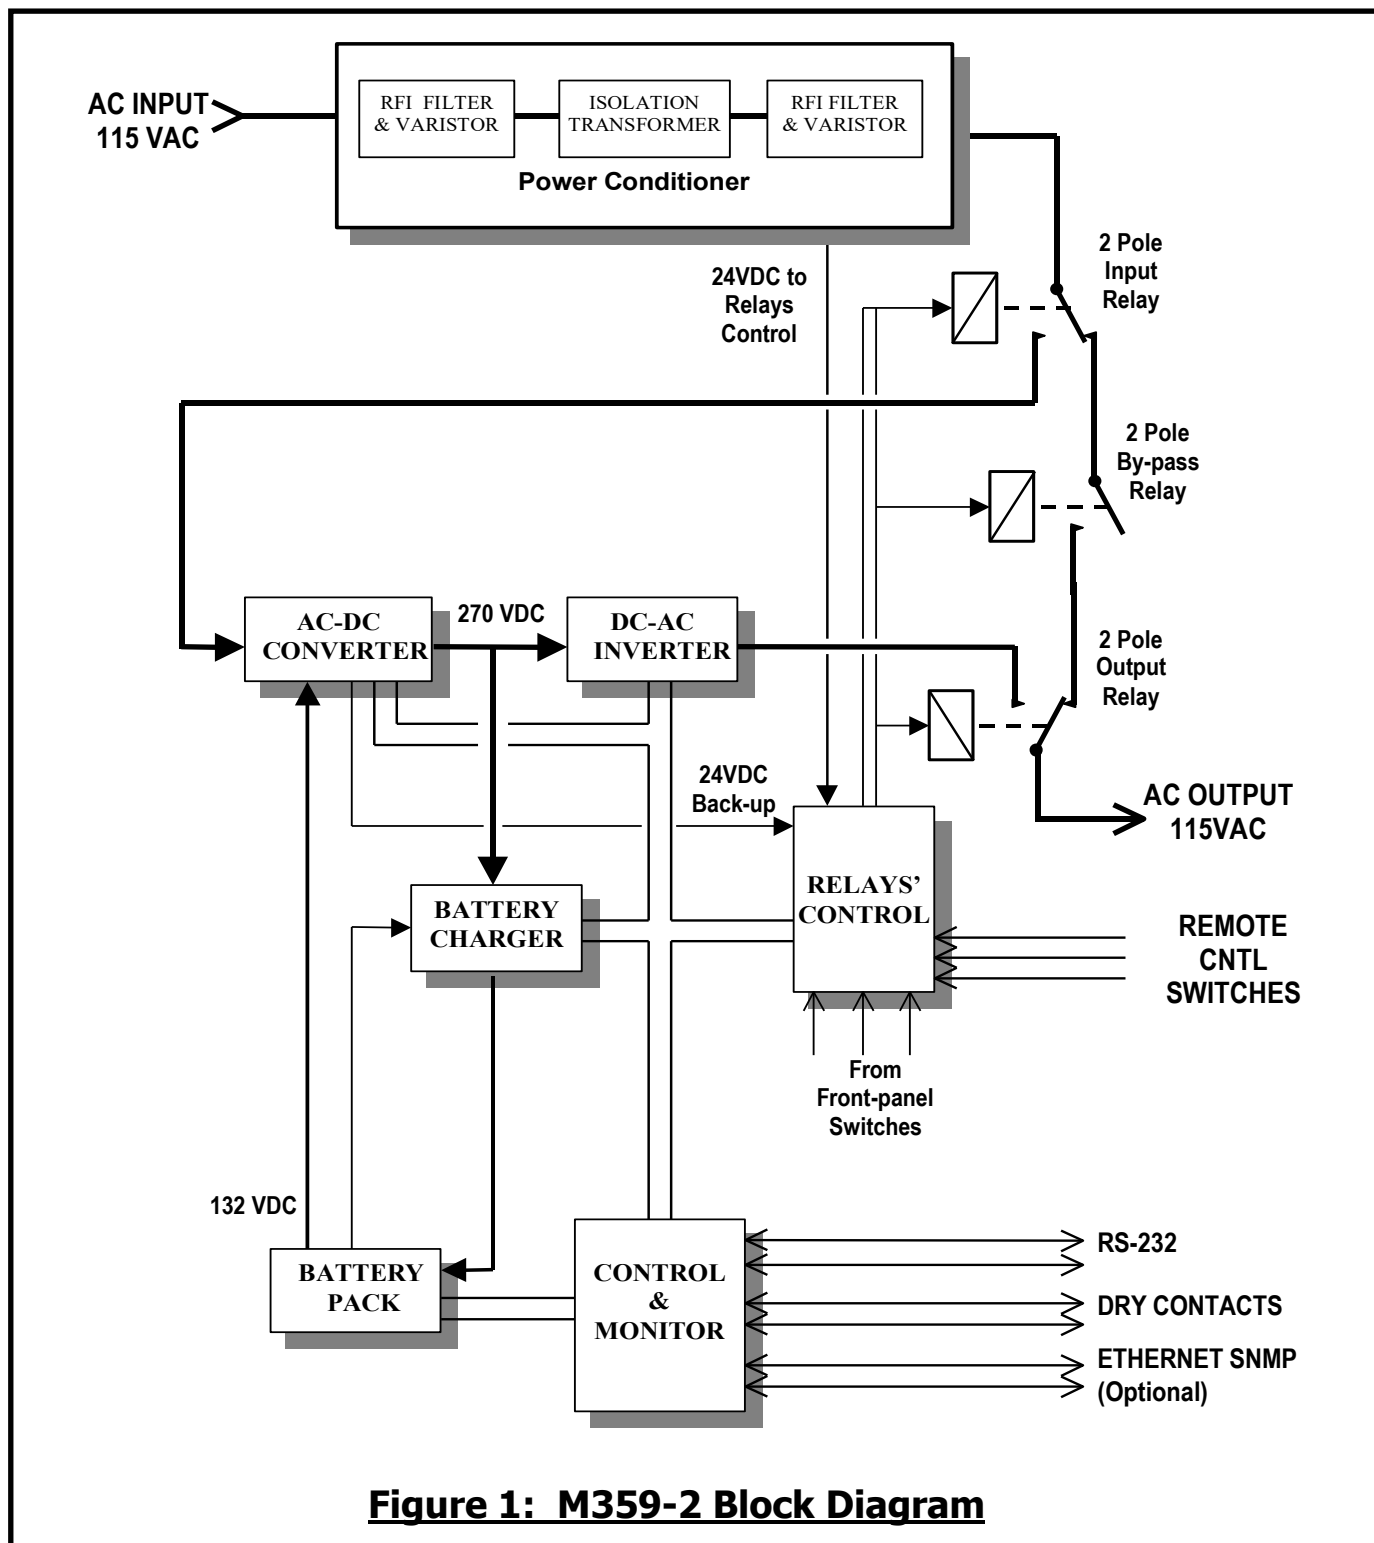

Specification

INPUT	Voltage Range	0 - 155VAC In Accordance with MIL-STD-1399, Section 300B.
	Switchover Voltage	Below 105VAC the M359 may switch to Battery power.
	Frequency	48-64 Hz
	P.F & Efficiency	P.F. > 0.98 and Eff>85% (at 1,900W load)
	Spikes	Withstands the 1,000V Spike specified by MIL-STD-1399 (300B)
	Isolation	Input is isolated from output and chassis (> 10 M Ohm at 600VDC). Total capacitance between input and chassis is less than 0.02uf per line. Leakage current is less than 2ma. Compatible with both Ungrounded Shipboard Power and Grounded Neutral power.
	Current Harmonic Distortion	Less than 2.5% for harmonics between 2 fo to 32 fo and less than 100%/N for harmonics between N=32 and 20kHz. (I.A.W. MIL-STD-1399).
	Inrush Current	Limited Per MIL-STD-1399 (300B).
	Power Interrupts	No damage and no interrupt on Output voltage for all conditions of MIL-STD-1399 (300B)
OUTPUT	Voltage & Frequency	115Vac $\pm$ 3%, grounded Neutral (Note 1). 60Hz $\pm$ 0.2% (digitally synthesized from a crystal oscillator)
	Power Rating	2.0KW (2.5KVA) Continues up to ambient temperature of +45°C. Derated linearly by 20W/°C to 1.8KW at +55°C (Note 2).
	Waveform	Sinusoidal , THD of 2% (linear load), 6% (non-linear)
	Capability with Limited Input Current	Delivers at least 1,900W when Input Current is limited to 25Amp
BATTERY	Type	Front Panel Loaded, Hot-swap Plug-in, encapsulated, sealed, maintenance-free, lead-acid, Battery Pack.
	Capacity (minimum at 25°C)	When using M359380-1 Battery: 1.9KW for 8 minutes and 1.5KW for 10 minutes. When using M359380-2 Battery: 1.9KW for 9 minutes and 1.5KW for 12 minutes.
	Charger	Low ripple, regulated float-charger, with current limiting and temperature compensation. Fully charges the battery within 6 hours (following full discharge at 1.9 kW).
	Protection	Protected from over-discharge and thermal runaway by internal protection circuit.
	Monitor	Charge level and internal impedance are monitored by the UPS micro-controller.
EMC	MIL-STD-461F	CE101, CE102, CS101, CS106, CS114, CS116 RE101, RE102, RS101 and RS103.
	DC Magnetic Field	1600A/m per DOD-STD-1399.

ENVIRONMENT	<i>Temperature</i>	Non-operating: -40 to +72°C (Note 3) Operating: 0 to + 55°C (Note 2)
	<i>Humidity</i>	Up to 95% RH per MIL-STD-810G, Method 507.5 Proc II..
	<i>Altitude</i>	Operating: Up to 10,000 feet. Non-operating: (Air transport) 40,000 feet.
	<i>Orientation</i>	May be installed at any orientation.
	<i>Mechanical Shock</i>	Withstands the high-impact shipboard shock IAW MIL-S-901D, Grade A, Class I and II.
	<i>Vibration</i>	Type I Deck Mounted vibration IAW MIL-STD-167-1. Random vibration IAW MIL-STD-810D, Cat. 9, Proc. I (test condition I-3.2.11, Fig. 514.3-34)
INDICATIONS & CONTROLS	<i>Visual Indications (Front panel)</i>	10-segment tri-color Bar Graph for load level display. 10-segment Bar Graph for battery charge level display. "Output OK", "Output Fail" and "Standby" status lamps. "Input OK" and "Input Fail" status lamps. "On Batt " status lamp. "Batt Passed" and "Batt Failed" lamps for battery self-test. "Low Batt" warning lamp. "Overload Shutdown" status lamp. "Overtemp warning" and "Overtemp Shutdown" lamps.
	<i>Test Mode</i>	When test mode is invoked by pressing the push-button on the front panel, the UPS performs battery impedance testing without interrupting the output power (even if the battery fails) utilizing a proprietary time-sharing circuit. The test results are displayed on the panel indicators. End-to-End testing of the UPS is accomplished by cycling the INPUT UPS/BY-PASS switch on the front panel.
	<i>Audible Alarm</i>	The UPS will beep when it operates on battery power or during over-temperature condition. The alarm may be silenced by pressing the "Alarm Off" push-button on the front panel.
	<i>Power Switches</i>	The M359 has three double-pole power relays, one on the input, one on the output and a third relay that bypasses the UPS section. The front panel switches allow the user to control these three power relays.
	<i>Remote Control</i>	Connector J4 on the back panel, allows the controlling of the M359 by a remote 28Vdc/0.25A single pole, On/Off switch (Remote Power On/Off) and a 28Vdc/0.25A, ON-ON, single pole switch (Remote UPS/By-Pass Select).

INTERFACE	Discrete interface	Four dry contacts indicating the following conditions: "UPS ON" (Output OK) "Battery Voltage Low" "Input Power Loss" (Battery Operation) "Fault Detect" A "Shutdown" input (via opto-isolator) for remote shutdown of the UPS during AC input fail. When the AC input recovers the UPS will automatically turn ON.
	Ethernet SNMP Port	RJ-45, CAT-5 SNMP v1, v2 or v3 Port with Server/ Client Monitor Software. Allows monitoring of the UPS (using MIBs). Supports user defined event-triggered shutdown. Supports different shutdown timing for each Client in the net. Supports delay UPS shutdown (after the Server has been shut down).
	Serial Interface	Optional (instead of Ethernet) RS-232 Serial port (EIA-RS-232). The serial port allows transmission of status and reception of User-Programmable Options, some of which are described below: Status: Input OK, Output OK, On Battery, Low Battery, Over-Temperature Warning, Battery Test Passed/Failed, Load Level, Charge Level, status of all User Programmable Options and failure diagnostic. Commands: UPS Shutdown, UPS Standby, Initiate Battery Test, Enable/Disable Periodic Battery Test, Enable/Disable Battle Mode, Enable/Disable Aural Alarm, Set Input power Limit (see Note 2), Protection Reset (resets all latching protection circuits), System Reset (forces all User Programmable Options into their default state and resets all latching protection circuits). For the complete set of the available Status messages and Commands, refer to the M120BA-1A Software Interface Manual. (Available at http://www.milpower.com).
SCREENING		Each unit is subjected to a Power Burn-in of 24 hours. Additional ESS is available upon request
ACOUSTIC NOISE		Less than 54dBA.
FUNGUS		Does not support fungus growth, in accordance with the guidelines of MIL-STD-454, Requirement 4.
WEIGHT and SIZE		140 Pounds. (88 Pounds without the Battery Pack.) 19", 3-U, 22" deep, Rack mount or Hard mount.

Notes

1. The Neutral Grounding Link is accessible to the user and may be removed to obtain a floating output (not recommended, may result in a safety hazard).
2. At ambient temperature above 45°C, the maximum steady-state output power should be derated from 2KW at 45°C to 1.8KW at 55°C. For short term loading (less than 5 minutes) no derating is required.
3. The non-operating temperature of the Battery Pack is -20 to +72°C therefore UPS with the Battery Pack installed should not be stored below -20°C.
Storing the UPS with the Battery Pack at high temperature for prolonged duration will shorten the battery life.

How to Order

Order P/N: **M359-2 -0 -1 -0 -0**

Basic Part Number

Special Options

- 0** None (STD.)
- 1** Reserved.
- 2** CRES top and bottom covers (instead of AI covers)

Communication Port

- 0** RS-232 and Dry-contacts
- 1** Ethernet SNMP (v1, v2 or v3), instead of RS-232 (STD.)

Optional Special Hardware

- 0** (STD.) None
- 1** With Mating Power Connectors set:
MS3108R20-19S (Qty 1, 90°, AC Input Conn.)
MS3108R20-19P (Qty 1, 90°, AC Output Conn.)
M85049/41-12A (Qty 2, Conn. Cable Clamps)
MS3420-12 (Qty 2, Telescoping Bushings for the Clamps)
- 2** Shipped with the Extended Capacity Battery Pack M359380-2 (instead of M359380-1)
- 3** -1 and -2 above
- 4** Shipped without a Battery Pack
- 5** -1 and -4 above

Optional Slides & Load Bearing Pins

- 0** (STD.) None
- 1** Slides: Actron P/N A5736-0111-003/4 or equivalent. Pins: Jonathan P/N 1005-406 or equivalent (mate with the UPS back panel's bushings)
- 2** Pins only (same as -1), but no slides.