

M7029 SERIES

DC/DC POWER SUPPLY



PRODUCT HIGHLIGHTS

- MINIATURE
- HIGH DENSITY
- SINGLE OUTPUT
- DC/DC POWER SUPPLY
- UP TO 300 W



Applications		
Military (Airborne, ground-fix, shipboard), Ruggedized, Telecom, Industrial		
Special Features		
<ul style="list-style-type: none"> • Miniature size • High efficiency • Wide input range • Remote sense • Remote inhibit 	<ul style="list-style-type: none"> • Input / Output isolation • High Density – up to 36 W/in³ • <u>Fixed</u> switching freq. (250 kHz) • External sync. capability • <u>EMI</u> filters included 	<ul style="list-style-type: none"> • Indefinite short circuit and current limit protection with auto-recovery • Over-voltage shutdown with auto-recovery • Over temperature shutdown with auto-recovery
Electrical Specifications*		
<u>DC Input</u>	<u>DC Output</u>	<u>Isolation</u>
Input range [†] : 18 to 48 V _{DC} No damage for: 100 V for 50 ms (IAW MIL-STD-1275A) 80 V for 0.1 s (IAW MIL-STD-704A)	Voltage range: 3.3 V _{DC} to 50 V _{DC} Current range: 0 to 20 A Power range: 0 to 300 W	Input to Output: 200 V _{DC} Input to Case: 200 V _{DC} Output to Case: 100 V _{DC}
<u>Line/Load/Temp regulation</u>	<u>Efficiency</u>	<u>EMC</u>
Up to ±1% (no load to full load, –55 °C to +85 °C and over input voltage range).	88% - 90% typical (full load, room temperature) 83% - 86% for extended input range	Designed to meet MIL-STD-461F [‡] CE101, CE102, CS101, CS114, CS115, CS116, RE101, RE102, RS101, RS103
<u>Ripple and Noise</u>	<u>Transient</u>	<u>Turn on Transient</u>
Less than 50 mV _{p-p} , typical (max. 100 mV) without external capacitance. When connected to system capacitance ripple drops significantly.	<u>Over-and-undershoot</u> Load transient at a rate of up to 0.5 A/μs	Output ramps up without overshooting during power on.
	Range	<u>Turn on Time:</u> less than 40 ms
	Excursio n	<u>Rise time:</u> less than 20 ms
	Settling time	
	50-100% ~ 1% < 20 μs	
	10-100% < 2.5% < 100 μs	

* Unless stated otherwise, all measurements specified here were taken from a 28V/10.7A output variant, at nominal line voltage and room ambient temperature.
[†] Standard version complies with various standards: MIL-STD-704B-F, MIL-STD-1275A-D, RTCA/DO-160G Section 16.0 Category A and more.
 Extended range version (12 to 100V_{DC} operation) available for compliance with even more standards: MIL-STD-704A (exc. 8V sag), MIL-STD-1275E, RTCA/DO-160G Section 16.0, Categories B & Z, DEF STAN 61-5 Part 6 Issue 5, BS EN2282.
[‡] Compliance achieved with 5μH LISN, shielded harness and static resistive load.

Protections***Input**

- **Input Reverse Polarity**
Protection for unlimited time, up to $-48 V_{DC}$.
- **Under-Voltage Lock-Out**
Unit shuts down if input voltage falls below $14 V \pm 1 V$, and turns back on at $16 V \pm 1 V$.
- **Over-Voltage Lock-Out**
Unit shuts down if input voltage rises above $54 V \pm 2 V$, and turns back on at $50 V \pm 2 V$. Extended versions available for compliance with various standards.

Output

- **Active Overvoltage Protection** Secondary independent control, fed directly from the output, is set to override the primary control in case of control loss, and keeps output voltage at $110\% \pm 5\%$ of nominal.
- **Passive Overvoltage Protection** Transorb placed across the output, selected at $120\% \pm 10\%$ of nominal voltage.
- **Current limiting**
Continuous protection (10-30% above maximum current) for unlimited time (Hiccup).

General

- **Over Temperature Protection:** Unit shuts down if baseplate temperature rises above $+105\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$. Unit recovers automatically when baseplate temperature falls below $+95\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$.

Environmental Conditions

Designed to meet MIL-STD-810G

Temperature

Method 501.5 Procedures I & II
Method 502.5 Procedures I & II
Operating: $-55\text{ }^{\circ}\text{C}$ to $+85\text{ }^{\circ}\text{C}$ (baseplate)
Storage: $-55\text{ }^{\circ}\text{C}$ to $+125\text{ }^{\circ}\text{C}$ (ambient)

Altitude

Method 500.5
Procedures I & II
Up to 70000 ft. Operational

Salt Fog:

Method 509.5

Humidity

Method 507.5
Up to 95% RH.

Vibration (Random)

Method 514.6
Random Vibration, Category 24,
Fig 514.6E-1.

Shock

Method 516.6
30 g, 11 ms terminal peak saw-tooth (all directions)

Reliability

150,000 hours, calculated per MIL-STD-217F Notice 2 at $+85\text{ }^{\circ}\text{C}$ base plate, Ground fixed.

Environmental Stress Screening (ESS)

Including random vibration and thermal cycles is also available. **Please consult factory for details.**

* Thresholds and protections can be modified / removed – please consult factory

Pin Assignment

Connector type: M24308/24-39F or eq.

Mates with: M24308/2-3F or eq.

Pin No.	Function	Pin No.	Function	Pin No.	Function
1	VIN (+)	10	VOUT RTN (-)	19	SYNC
2	VIN (+)	11	VOUT RTN (-)	20	VOUT (+)
3	VIN (+)	12	VOUT RTN (-)	21	VOUT (+)
4	VIN RTN (-)	13	SENSE (+)	22	VOUT (+)
5	VIN RTN (-)	14	VIN (+)	23	VOUT RTN (-)
6	SIGNAL RTN	15	VIN (+)	24	VOUT RTN (-)
7	INHIBIT	16	VIN RTN (-)	25	SENSE RTN (-)
8	VOUT (+)	17	VIN RTN (-)		
9	VOUT (+)	18	VIN RTN (-)		

Functions and Signals

INHIBIT signal

The **INHIBIT** signal is used to turn the power supply ON and OFF.

TTL “1” or OPEN – will turn on the power supply (For normal operation leave the signal not connected). TTL “0” or short– will turn off the power supply.

(Optional to change the logic of this signal. Please consult with factory.)

SYNC signal

The **SYNC** signal is used to allow the power supply frequency to sync with the system frequency.

The system frequency should be 250 kHz \pm 10 kHz.

When not connected the power supply will work at 250 kHz \pm 10 kHz.

SIGNAL RTN

The **SIGNAL RTN** is used as a return path for **SYNC** and **INHIBIT** signals. This pin is referenced to **VIN RTN**.

SENSE


The **SENSE** is used to achieve accurate load regulation at load terminals. This is done by connecting the pins directly to the load terminals.

The remote sense correction function is limited to voltage drop between converter’s output and load terminals of 2% to 5%, or up to 0.5V, the least of the two.

When not used, connect **SENSE** to **VOUT** and **SENSE RTN** to **VOUT RTN**.

Do not leave **SENSE** and **SENSE RTN** pins unconnected. These pins can be tied internally to avoid external connection, if function is not required – *consult factory*.

Outline Drawing

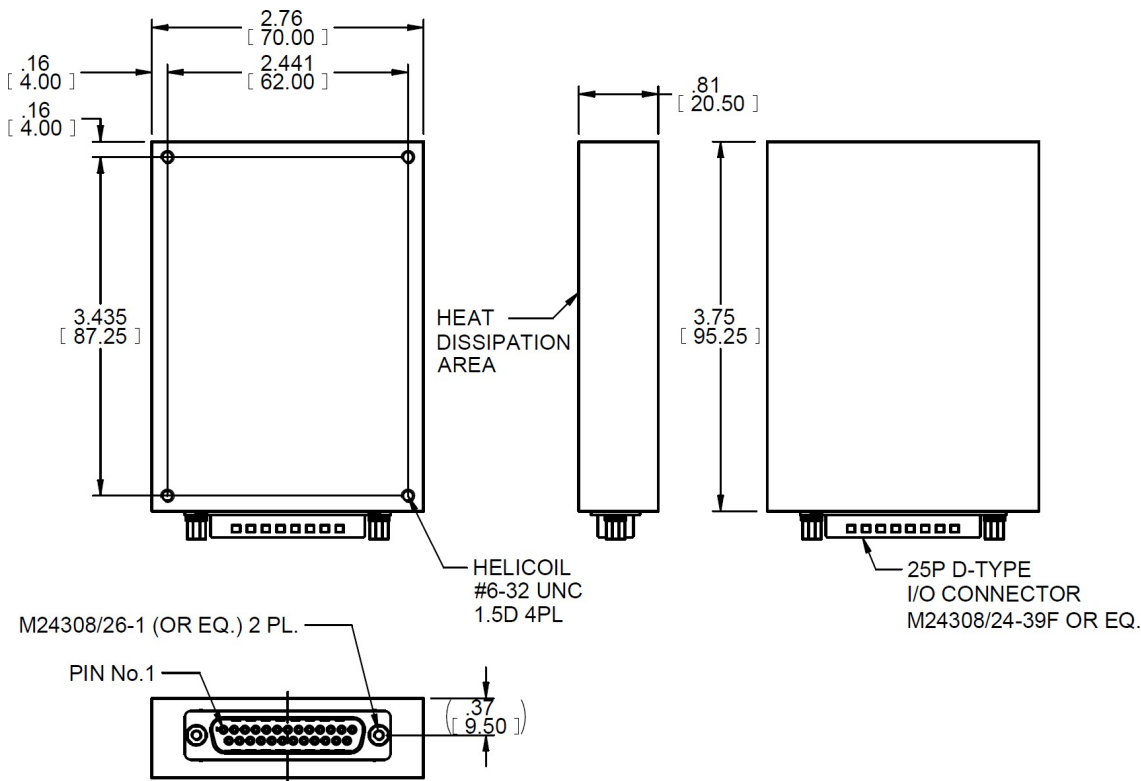

M24308/26-1 (OR EQ.) 2 PL.

HEAT DISSIPATION AREA

HELICOIL #6-32 UNC 1.5D 4PL


25P D-TYPE I/O CONNECTOR M24308/24-39F OR EQ.

PIN No.1

Notes

1. Dimensions are in Inches [mm]
2. Tolerance is:
 .XX ± 0.01 in
 .XXX ± 0.005 in
3. Expected weight: 10.6 oz [300 g]

Heat Dissipation Surface

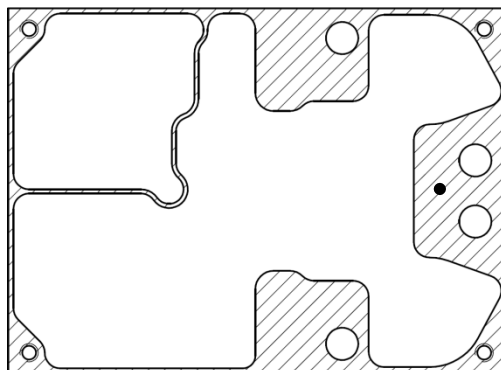

Heat Dissipation Area:
 2.616 in²
 [1690 mm²]

Note: Specifications are subject to change without prior notice by the manufacturer.