


## M7419 SERIES

*DC/DC POWER SUPPLY*

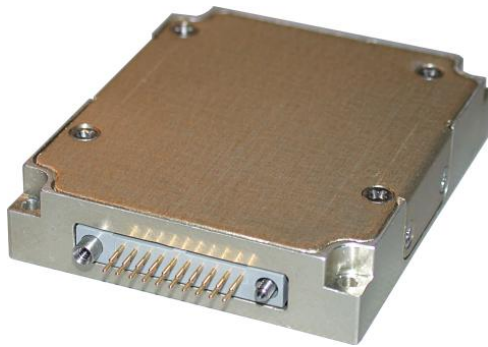

### PRODUCT HIGHLIGHTS

- MINIATURE
- HIGH DENSITY
- SINGLE OUTPUT
- DC/DC CONVERTER
- UP TO 50W

## M7419 Series– DC/DC Power Supply

<p><b>Applications</b> Military (Airborne, ground-fix, shipboard), Ruggedized, Telecom, Industrial</p>											
<p><b>Special Features</b></p> <ul style="list-style-type: none"> <li>• Miniature size</li> <li>• High efficiency</li> <li>• Wide input range</li> <li>• Input / Output isolation</li> <li>• Remote sense compensation</li> <li>• Remote Inhibit (On/Off)</li> <li>• Fixed switching freq. (250 kHz)</li> <li>• External sync. capability</li> <li>• EMI filters included</li> <li>• Conduction cooled</li> <li>• Non-latching protections: <ul style="list-style-type: none"> <li>○ Overload/short-circuit</li> <li>○ Over-voltage</li> <li>○ Over temperature</li> </ul> </li> </ul>											
<p><b>Electrical Specifications</b></p> <table style="width: 100%; border: none;"> <tr> <td style="width: 33%; vertical-align: top; padding: 5px;"> <p><b><u>DC Input</u></b> Normal range: 18 to 48 V<sub>DC</sub></p> <p>Not damaged (may restart) when exposed to surges IAW MIL-STD-1275A (100 V / 50 ms) and IAW MIL-STD-704A (80 V / 0.1 s)</p> </td> <td style="width: 33%; vertical-align: top; padding: 5px;"> <p><b><u>DC Output</u></b> Voltage range: 1.8 to 50 V<sub>DC</sub> Current: 0 to 10 A Power: 0 to 50 W</p> </td> <td style="width: 33%; vertical-align: top; padding: 5px;"> <p><b><u>Isolation</u></b> Input to Output: 200 V<sub>DC</sub> Input to Case: 200 V<sub>DC</sub> Output to Case: 100 V<sub>DC</sub></p> </td> </tr> <tr> <td style="vertical-align: top; padding: 5px;"> <p><b><u>Output Voltage Regulation</u></b> Better than or equal to ±1% (low to high line voltage, no load to full load, –55 °C to +85 °C at baseplate).</p> </td> <td style="vertical-align: top; padding: 5px;"> <p><b><u>Efficiency</u></b> Typically 70% to 80%, depending on output voltage.</p> <p>Up to 83% @ 28 V<sub>DC</sub> output, 28 V<sub>DC</sub> input, full load and room temperature.</p> </td> <td style="vertical-align: top; padding: 5px;"> <p><b><u>EMC</u></b> Complies with MIL-STD-1686 Indirect 4 kV ESD.</p> <p>Designed to meet* MIL-STD-461F CE101, CE102, CS101, CS114, CS115, CS116, RE101, RE102, RS101, RS103</p> </td> </tr> <tr> <td style="vertical-align: top; padding: 5px;"> <p><b><u>Ripple and Noise</u></b> Maximum 1% or less typical without external capacitance. When connected to system capacitance ripple drops significantly.</p> </td> <td style="vertical-align: top; padding: 5px;"> <p><b><u>Load Transient Overshoot and undershoot</u></b> Output resistance at load change of 50%-100% is 30-70 mΩ (depending on output voltage). Output back to steady stated within 300-500 μs</p> </td> <td style="vertical-align: top; padding: 5px;"> <p><b><u>Turn on Transient</u></b> No voltage overshoot during power on.</p> </td> </tr> </table>			<p><b><u>DC Input</u></b> Normal range: 18 to 48 V<sub>DC</sub></p> <p>Not damaged (may restart) when exposed to surges IAW MIL-STD-1275A (100 V / 50 ms) and IAW MIL-STD-704A (80 V / 0.1 s)</p>	<p><b><u>DC Output</u></b> Voltage range: 1.8 to 50 V<sub>DC</sub> Current: 0 to 10 A Power: 0 to 50 W</p>	<p><b><u>Isolation</u></b> Input to Output: 200 V<sub>DC</sub> Input to Case: 200 V<sub>DC</sub> Output to Case: 100 V<sub>DC</sub></p>	<p><b><u>Output Voltage Regulation</u></b> Better than or equal to ±1% (low to high line voltage, no load to full load, –55 °C to +85 °C at baseplate).</p>	<p><b><u>Efficiency</u></b> Typically 70% to 80%, depending on output voltage.</p> <p>Up to 83% @ 28 V<sub>DC</sub> output, 28 V<sub>DC</sub> input, full load and room temperature.</p>	<p><b><u>EMC</u></b> Complies with MIL-STD-1686 Indirect 4 kV ESD.</p> <p>Designed to meet* MIL-STD-461F CE101, CE102, CS101, CS114, CS115, CS116, RE101, RE102, RS101, RS103</p>	<p><b><u>Ripple and Noise</u></b> Maximum 1% or less typical without external capacitance. When connected to system capacitance ripple drops significantly.</p>	<p><b><u>Load Transient Overshoot and undershoot</u></b> Output resistance at load change of 50%-100% is 30-70 mΩ (depending on output voltage). Output back to steady stated within 300-500 μs</p>	<p><b><u>Turn on Transient</u></b> No voltage overshoot during power on.</p>
<p><b><u>DC Input</u></b> Normal range: 18 to 48 V<sub>DC</sub></p> <p>Not damaged (may restart) when exposed to surges IAW MIL-STD-1275A (100 V / 50 ms) and IAW MIL-STD-704A (80 V / 0.1 s)</p>	<p><b><u>DC Output</u></b> Voltage range: 1.8 to 50 V<sub>DC</sub> Current: 0 to 10 A Power: 0 to 50 W</p>	<p><b><u>Isolation</u></b> Input to Output: 200 V<sub>DC</sub> Input to Case: 200 V<sub>DC</sub> Output to Case: 100 V<sub>DC</sub></p>									
<p><b><u>Output Voltage Regulation</u></b> Better than or equal to ±1% (low to high line voltage, no load to full load, –55 °C to +85 °C at baseplate).</p>	<p><b><u>Efficiency</u></b> Typically 70% to 80%, depending on output voltage.</p> <p>Up to 83% @ 28 V<sub>DC</sub> output, 28 V<sub>DC</sub> input, full load and room temperature.</p>	<p><b><u>EMC</u></b> Complies with MIL-STD-1686 Indirect 4 kV ESD.</p> <p>Designed to meet* MIL-STD-461F CE101, CE102, CS101, CS114, CS115, CS116, RE101, RE102, RS101, RS103</p>									
<p><b><u>Ripple and Noise</u></b> Maximum 1% or less typical without external capacitance. When connected to system capacitance ripple drops significantly.</p>	<p><b><u>Load Transient Overshoot and undershoot</u></b> Output resistance at load change of 50%-100% is 30-70 mΩ (depending on output voltage). Output back to steady stated within 300-500 μs</p>	<p><b><u>Turn on Transient</u></b> No voltage overshoot during power on.</p>									

\* Compliance achieved with 5μH LISN, shielded harness and static resistive load.

## M7419 Series– DC/DC Power Supply

### Protections <sup>†</sup>

#### Input

- **Under-Voltage Lockout**  
Unit may shut down if input voltage drops below  $16.5 \pm 1$  V.
- **Over-Voltage Lockout**  
Unit may shut down if input voltage rises above  $52 \pm 2$  V.
- **Reverse Polarity Protection- Optional please consult factory**

#### Output

- **Over-Voltage Protection**  
Passive transorb, chosen at  $120\% \pm 10\%$  of nominal voltage.
- **Current Limiting**  
Continuous protection (10-30% above maximum current) for unlimited time (Hiccup).

#### General

- **Over temperature protection:** Shutdown if base plate temperature rises above  $+105\text{ °C} \pm 5\text{ °C}$ .  
Auto recovery when baseplate cools down to  $+95\text{ °C} \pm 5\text{ °C}$ .

### Environmental Conditions

Designed to meet MIL-STD-810F

#### Temperature

Methods 501.4 & 502.4  
Operating:  $-55\text{ °C}$  to  $+85\text{ °C}$  (at baseplate)  
Storage:  $-55\text{ °C}$  to  $+125\text{ °C}$  (ambient)

#### Vibration

Method 514.5  
Procedure I  
 $14.76\text{ g}_{rms}$  20-2000 Hz for 500 seconds at each of 3 perpendicular axes.

#### Altitude

Method 500.4  
Procedures I – Storage/Air transport:  
up to 70,000 ft. (non-operational)  
Procedure II – Operation/Air Carriage:  
up to 70,000 ft. (operational)

#### Shock

Method 516.5  
Procedure I  
50 g / 11 ms terminal peak half-sine shock pulse

#### Humidity

Method 507.4  
Up to 95% RH

#### Salt Fog

Method 509.4


### Reliability

150,000 hours, calculated IAW MIL-HDBK-217F Notice 2 at  $+85\text{ °C}$  baseplate, Ground fixed conditions.


**M7419 Series– DC/DC Power Supply**

**Efficiency vs. Load**

- **5 V<sub>DC</sub> output:**

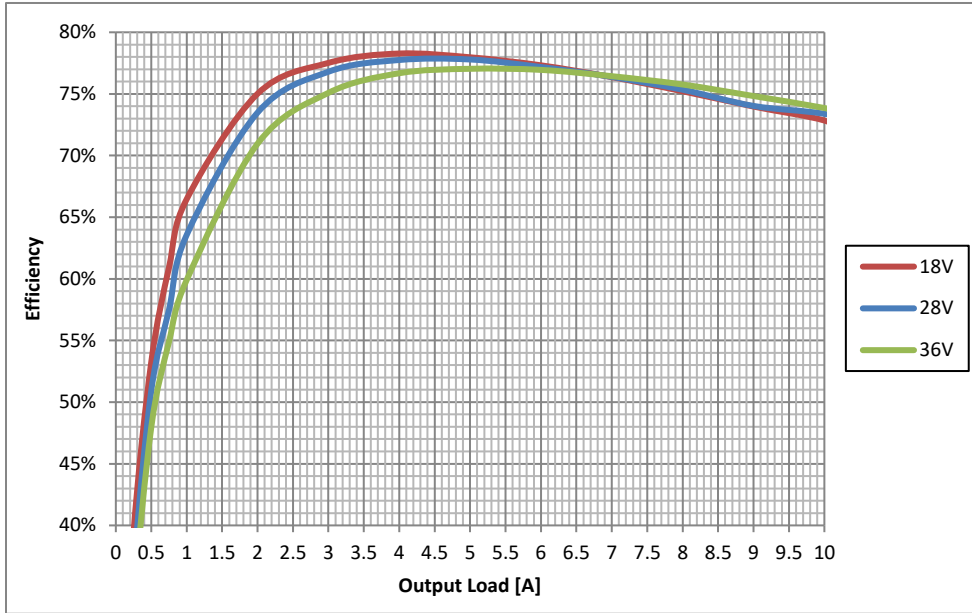

- **28 V<sub>DC</sub> output:**

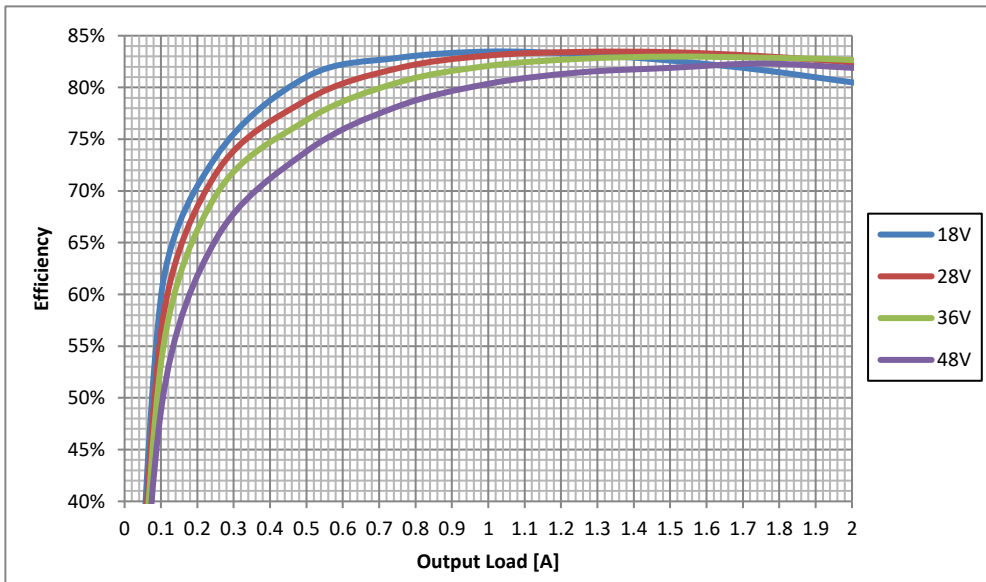


## M7419 Series– DC/DC Power Supply

### Pin Assignment

**Connector type:** RM272-020-322-2900 or eq.

**Mates with:** RM242-020-571-5900 (crimp removable contacts) or RM242-020-241-5900  
(solder cup contacts) or eq.

Pin #	Function	Polarity		Pin #	Function	Polarity	
1	INPUT	+	●	11	INPUT	+	●
2	INPUT	+	●	12	INPUT RTN	-	●
3	INPUT RTN	-	●	13	INPUT RTN	-	●
4	INHIBIT	+	●	14	N.C.		
5	SYNC	+	●	15	N.C.		
6	SENSE RTN	-	●	16	SENSE	+	●
7	OUTPUT RTN	-	●	17	OUTPUT RTN	-	●
8	OUTPUT RTN	-	●	18	OUTPUT RTN	-	●
9	OUTPUT	+	●	19	OUTPUT	+	●
10	OUTPUT	+	●	20	OUTPUT	+	●



**Note:** All output pins with the same function should be connected together for best performance.

## M7419 Series– DC/DC Power Supply

### Functions and Signals

#### INHIBIT signal

The INHIBIT signal is used to turn the power supply ON and OFF.

TTL “1” or OPEN – will turn on the power supply. (For normal operation leave the signal not connected.)

TTL “0” – will turn off the power supply.

Grounding for signal is VIN RTN pin.

#### SYNC signal

The SYNC signal is used to allow the power supply frequency to sync with the system frequency.

SYNC frequency can be  $250 \pm 10$  kHz, TTL level.

When left open, the power supply will work at  $250 \pm 10$  kHz (internal clock).

This signal is referenced to VIN RTN pin.

#### SENSE


The SENSE is used to achieve accurate load regulations at load terminals (this is done by connecting the pins directly to the load’s terminals).

The use of remote sense has a limit of voltage dropout between converter’s output and load terminals of

2-10% of voltage output.

**When not used connect SENSE to VOUT and SENSE RTN to VOUT RTN.**

### Typical Connection Diagram

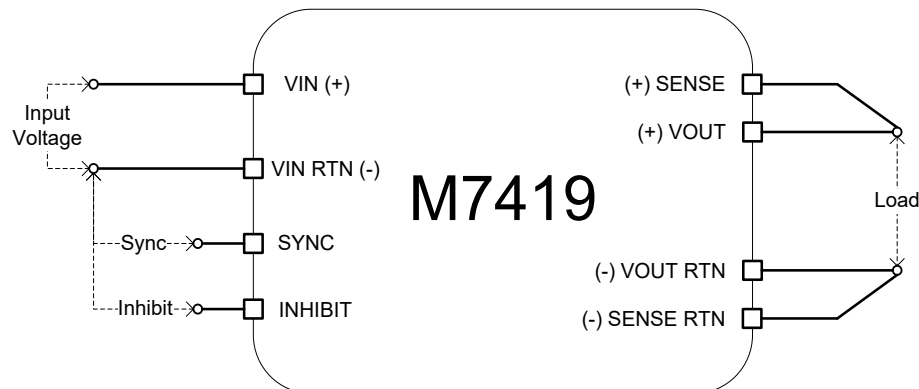



## M7419 Series– DC/DC Power Supply

### Standard Variants

Part number	Input configuration	Output configuration
M7419-100	18-48 V <sub>DC</sub>	5 V <sub>DC</sub> / 8 A
M7419-101	18-48 V <sub>DC</sub>	12 V <sub>DC</sub> / 3 A
M7419-102	18-48 V <sub>DC</sub>	15 V <sub>DC</sub> / 2.5 A
M7419-103	18-48 V <sub>DC</sub>	24 V <sub>DC</sub> / 2 A
M7419-104	18-48 V <sub>DC</sub>	28 V <sub>DC</sub> / 1.8 A
M7419-105	18-48 V <sub>DC</sub>	48 V <sub>DC</sub> / 0.8 A
M7419-106	18-50 V <sub>DC</sub>	24 V <sub>DC</sub> / 2 A
M7419-800*	18-48 V <sub>DC</sub>	5 V <sub>DC</sub> / 8 A
M7419-801*	18-48 V <sub>DC</sub>	12 V <sub>DC</sub> / 3 A
M7419-802*	18-48 V <sub>DC</sub>	15 V <sub>DC</sub> / 2.5 A
M7419-803*	18-48 V <sub>DC</sub>	24 V <sub>DC</sub> / 2 A
M7419-804*	18-48 V <sub>DC</sub>	28 V <sub>DC</sub> / 1.8 A
M7419-805*	18-48 V <sub>DC</sub>	48 V <sub>DC</sub> / 0.8 A
M7419-806*	18-50 V <sub>DC</sub>	24 V <sub>DC</sub> / 2 A

\* This Product is REACH Compliant.

\* The aluminum parts comprising this converter are chromate conversion coated per MIL-DTL-5541F, Type II CLASS 1A or eq.

**Note: Specifications are subject to change without prior notice by the manufacturer.**