


M8263 SERIES

DC/DC POWER SUPPLY

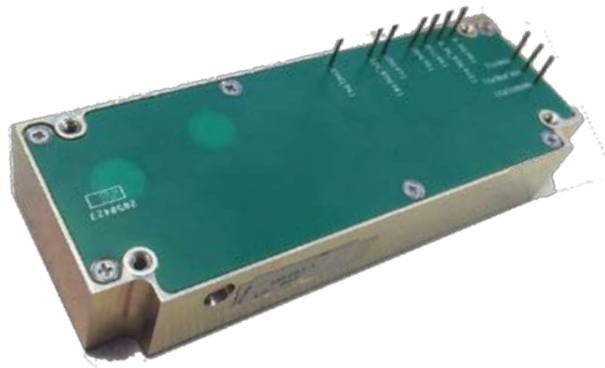

PRODUCT HIGHLIGHTS

- MINIATURE, HIGH DENSITY DESIGN
- LOW RIPPLE
- DUAL OUTPUT (UP TO 150W)
- DC/DC POWER SUPPLY



<p>Applications</p> <p>Military (Airborne, ground-fix, shipboard), Ruggedized, Telecom, Industrial</p>											
<p>Special Features</p> <ul style="list-style-type: none"> • Miniature size • High efficiency • Wide input range • Input / Output isolation • I2C temperature reading • External On/Off Inhibit • <u>Fixed</u> switching frequency (250 kHz) • External synchronization capability • <u>EMI/RFI</u> filters included • Reverse Polarity Protection • Indefinite short circuit protection with auto-recovery • Over-voltage shutdown with auto-recovery • Over temperature shutdown with auto-recovery 											
<p>Electrical Specifications</p> <table border="0" style="width: 100%;"> <tr> <td style="vertical-align: top; width: 33%;"> <p><u>DC Input:</u> DC Input range: 18 to 48 V_{DC}, per MIL-STD-704F. No damage for: MIL-STD-1275A (100V for 50mSec) MIL-STD-704A (80V for 0.1 Sec)</p> </td> <td style="vertical-align: top; width: 33%;"> <p><u>DC Output:</u> Output #1 range – 3.3V to 12V Output #1 current – max 10A Output #2 range - 1.2V to 5.5V Output #2 current – max 10A Total Output power – 150W</p> </td> <td style="vertical-align: top; width: 33%;"> <p><u>Isolation:</u> 200V between Input and Output 200V between Input and Case 100V between Output and Case</p> </td> </tr> <tr> <td style="vertical-align: top;"> <p><u>Line/Load regulation:</u> Less than 2% (no load to full load, –55°C to +85°C).</p> </td> <td style="vertical-align: top;"> <p><u>Efficiency:</u> 84% - Typical (full load, room temperature)</p> </td> <td style="vertical-align: top;"> <p><u>EMI/RFI:</u> Design to meet or exceed** MIL-STD-461F CE102, CS114, CS115, CS116, RS101, RS103</p> </td> </tr> <tr> <td style="vertical-align: top;"> <p><u>Ripple and Noise:</u> Less than 50mVp-p, typical (max. 1%) @ Input Voltage of 18V-36V without external capacitance. When connected to system capacitance ripple drops significantly.</p> </td> <td style="vertical-align: top;"> <p><u>Load Transient Overshoot and undershoot</u> Output resistance at load change of 50%-100% is 30-120mOhm (depending on output voltage). Output back to steady stated within 300-500µSec</p> </td> <td style="vertical-align: top;"> <p><u>Turn on Transient</u> Voltage overshoot during power on is less than 3% nominal voltage.</p> </td> </tr> </table>			<p><u>DC Input:</u> DC Input range: 18 to 48 V_{DC}, per MIL-STD-704F. No damage for: MIL-STD-1275A (100V for 50mSec) MIL-STD-704A (80V for 0.1 Sec)</p>	<p><u>DC Output:</u> Output #1 range – 3.3V to 12V Output #1 current – max 10A Output #2 range - 1.2V to 5.5V Output #2 current – max 10A Total Output power – 150W</p>	<p><u>Isolation:</u> 200V between Input and Output 200V between Input and Case 100V between Output and Case</p>	<p><u>Line/Load regulation:</u> Less than 2% (no load to full load, –55°C to +85°C).</p>	<p><u>Efficiency:</u> 84% - Typical (full load, room temperature)</p>	<p><u>EMI/RFI:</u> Design to meet or exceed** MIL-STD-461F CE102, CS114, CS115, CS116, RS101, RS103</p>	<p><u>Ripple and Noise:</u> Less than 50mVp-p, typical (max. 1%) @ Input Voltage of 18V-36V without external capacitance. When connected to system capacitance ripple drops significantly.</p>	<p><u>Load Transient Overshoot and undershoot</u> Output resistance at load change of 50%-100% is 30-120mOhm (depending on output voltage). Output back to steady stated within 300-500µSec</p>	<p><u>Turn on Transient</u> Voltage overshoot during power on is less than 3% nominal voltage.</p>
<p><u>DC Input:</u> DC Input range: 18 to 48 V_{DC}, per MIL-STD-704F. No damage for: MIL-STD-1275A (100V for 50mSec) MIL-STD-704A (80V for 0.1 Sec)</p>	<p><u>DC Output:</u> Output #1 range – 3.3V to 12V Output #1 current – max 10A Output #2 range - 1.2V to 5.5V Output #2 current – max 10A Total Output power – 150W</p>	<p><u>Isolation:</u> 200V between Input and Output 200V between Input and Case 100V between Output and Case</p>									
<p><u>Line/Load regulation:</u> Less than 2% (no load to full load, –55°C to +85°C).</p>	<p><u>Efficiency:</u> 84% - Typical (full load, room temperature)</p>	<p><u>EMI/RFI:</u> Design to meet or exceed** MIL-STD-461F CE102, CS114, CS115, CS116, RS101, RS103</p>									
<p><u>Ripple and Noise:</u> Less than 50mVp-p, typical (max. 1%) @ Input Voltage of 18V-36V without external capacitance. When connected to system capacitance ripple drops significantly.</p>	<p><u>Load Transient Overshoot and undershoot</u> Output resistance at load change of 50%-100% is 30-120mOhm (depending on output voltage). Output back to steady stated within 300-500µSec</p>	<p><u>Turn on Transient</u> Voltage overshoot during power on is less than 3% nominal voltage.</p>									
<p>Protections *</p> <table border="0" style="width: 100%;"> <tr> <td style="vertical-align: top; width: 33%;"> <p><u>Input</u></p> <ul style="list-style-type: none"> • Inrush Current Limiter – peak value of 5 x I_{in} for less than 50µSec. • Under voltage protection – unit protects itself (no damage) below 16.5Vdc. </td> <td style="vertical-align: top; width: 33%;"> <p><u>Output</u></p> <ul style="list-style-type: none"> • Passive transorb on outputs – 20% above nominal voltage and or active protection • Current limiting – Continuous protection (10-30% above maximum current) for unlimited time (Hiccup). </td> <td style="vertical-align: top; width: 33%;"> <p><u>General</u></p> <ul style="list-style-type: none"> • Over temperature protection: Shutdown at internal temperature of +95°C (±5°C) Automatic recovery at baseplate temperature lower than +85°C (±5°C) </td> </tr> </table>			<p><u>Input</u></p> <ul style="list-style-type: none"> • Inrush Current Limiter – peak value of 5 x I_{in} for less than 50µSec. • Under voltage protection – unit protects itself (no damage) below 16.5Vdc. 	<p><u>Output</u></p> <ul style="list-style-type: none"> • Passive transorb on outputs – 20% above nominal voltage and or active protection • Current limiting – Continuous protection (10-30% above maximum current) for unlimited time (Hiccup). 	<p><u>General</u></p> <ul style="list-style-type: none"> • Over temperature protection: Shutdown at internal temperature of +95°C (±5°C) Automatic recovery at baseplate temperature lower than +85°C (±5°C) 						
<p><u>Input</u></p> <ul style="list-style-type: none"> • Inrush Current Limiter – peak value of 5 x I_{in} for less than 50µSec. • Under voltage protection – unit protects itself (no damage) below 16.5Vdc. 	<p><u>Output</u></p> <ul style="list-style-type: none"> • Passive transorb on outputs – 20% above nominal voltage and or active protection • Current limiting – Continuous protection (10-30% above maximum current) for unlimited time (Hiccup). 	<p><u>General</u></p> <ul style="list-style-type: none"> • Over temperature protection: Shutdown at internal temperature of +95°C (±5°C) Automatic recovery at baseplate temperature lower than +85°C (±5°C) 									

* Thresholds and protections can be modified / removed – please consult factory.

**Compliance achieved with 5µH LISN, shielded harness and static resistive load.

Environmental

Design to Meet MIL-STD-810F

Temperature:

Operating: -55°C to +85°C
(baseplate)

Storage: -55°C to +125°C

Humidity:

Method 507.4 - Up to 95%.

Altitude:

Method 500.4, Procedure I & II,
40,000 ft. and 70,000 ft. Operational

Vibration and Shock:

Shock - Saw-tooth, 20g peak, 11mS.
Vibration - Figure 514.5C-17. General
minimum integrity exposure. (1 hour per
axis.)

Salt Fog:

Method 509-4

Reliability

150,000 hours, calculated per
MIL-STD-217F at +85°C baseplate,
Ground fixed.

Environmental Stress Screening (ESS)

Including random vibration and thermal cycles is also available. **Please consult factory for details.**

Pin Assignment

Pin Number	Function	Pin Number	Function
Output 1	12V	INHIBIT	Normally Open
Output 1 RTN	12V RTN	Vin	Power Vin
Output 2	5.5V	Vin RTN	Power RTN
Output 2 RTN	5.5V RTN		
SYNC	External clock		
SDA	Temperature DATA		
SCL	Temperature CLOCK		

* All output parallel pins should be connected together for best performance.

Functions and Signals**INHIBIT signal**

The INHIBIT signal is used to turn the power supply ON and OFF.

TTL “1” or OPEN – will turn on the power supply. (For normal operation leave the signal not connected.) TTL “0” – will turn off the power supply.

Referrer to Input RTN

SYNC IN signal

The SYNC IN signal is used to allow the power supply frequency to sync with the system frequency. The system frequency should be 250 kHz \pm 10 kHz.


When not connected the power supply will work at 250 kHz

Referrer to 12V RTN

SDA -I2C DATA LINE, Referrer to 12V RTN

SCL -I2C CLK LINE, Referrer to 12V RTN

Outline Drawing

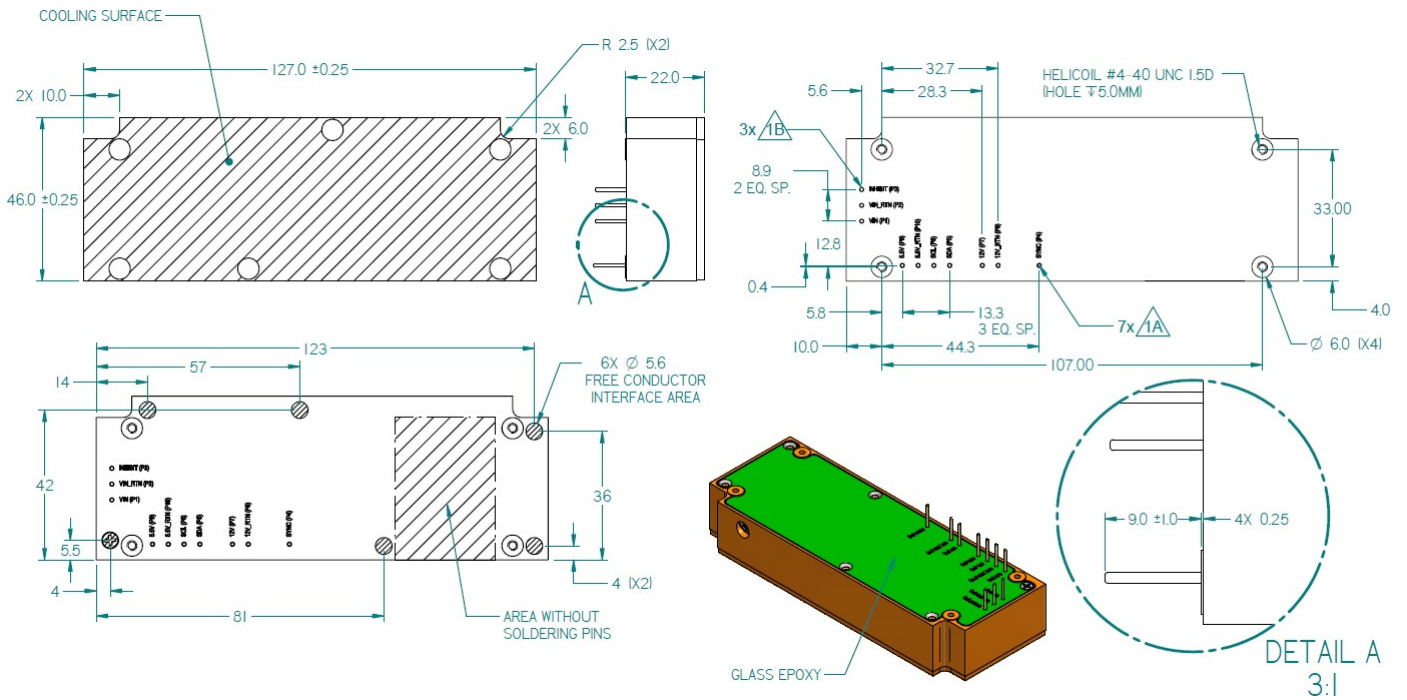

Heat Dissipation

Heat Dissipation Area
5550 mm²

Notes

1. Dimensions are in inches [mm]
2. Tolerance is:
.XX ± 0.01 IN
.XXX ± 0.005 IN
3. Weight: Approx. 254 g (8.96 oz)

** Specifications are subject to change without prior notice by the manufacturer.*